

CQD20LB

LI-ION REACH TRUCK 2.0T

 2000 kg  12000 mm  48 V Li-Ion

LITEF
FORKLIFT

LITEF
FORKLIFT



CQD20LB serisi, yüksek yoğunluklu depolar, lojistik merkezleri ve dağıtım merkezleri için idealdir. Optimize edilmiş direği, tam kaldırma yüksekliğinde bile stabilite sağlarken, orantılı kaldırma özelliği ağır veya kırılabilir malların nazik ve hassas bir şekilde taşınmasını sağlar. Kompakt boyutları ve dar dönüş kabiliyeti ile alan kısıtlamalı ortamlara çok uygundur. Soğuk depolama adaptasyonu, güvenlik uyarı sistemleri ve telematik gibi opsiyonel özellikler, CQD20LB'yi sektörler genelinde çok yönlü bir seçenek haline getirir.

SPECIFICATION	REF	UNIT	VALUE
Battery type			Li-Ion
Battery nominal capacity		Ah	405
Battery voltage		V	48
Load capacity	Q	kg	2000
Load centre distance	c	mm	600
Service weight		kg	3940
Lift height	h ₃	mm	9500
Height, mast extended	h ₄	mm	10560
Overall length		mm	2443
Overall width	b ₁ /b ₂	mm	1270
Length to face of forks	l ₂	mm	1373
Fork dimensions	s/e/l	mm	40/120/1070
Turning radius		Wa	1770
Operator type			Seated
Load distance, centre of drive axle to fork		mm	399
Wheelbase		mm	1515

Features

Lithium technology for great effectiveness

CQD20LB adopts 48V Li-ion battery as standard and it features zero battery maintenance and opportunity charging during breaks. This makes CQD20LB a flexible and cost-effective tool to store and retrieve pallets in multi working shifts. Plus, the charging port is external for easy charging and protected by a cover from water and dust ingress for charging safety.



Performance for productivity boost

CQD20LB offers a greater reach distance of 610mm and retrieving. The lifting and lowering speeds are also improved to reduce your cycle times and elevate your working efficiency.

Complete configurations for easy operation

CQD20LB is of tremendous help to the operator with full-color display, electric steering with damping, joystick system as well as proportional hydraulic system, which the operator can take advantage of to handle loads more easily and precisely.



Enhanced mast with better visibility and safety

CQD20LB's mast enables an unimpeded view of raised loads since the cylinders are moved to the side, and the enhanced mast is also vibration-free. This makes it ideal for safe operation at heights up to 9.5m, with nominal capacity performance up to 6.5m.

Easy maintenance

The seat can be easily turned sideways, providing a quick access to internal components for daily maintenance and repair.




Spacious operation space

CQD20LB offers spacious legroom and a suspension seat to fulfill the ergonomic needs and ensure effective operation.


VDI Chart

SPECIFICATION		REF	UNIT	VALUE
1.4	Operator type			Seated
1.5	Load capacity	Q	kg	2000
1.6	Load centre distance	c	mm	600
1.8	Load distance, centre of drive axle to fork		mm	399
1.9	Wheelbase		mm	1515
2.1	Service weight		kg	3940
2.2	Axle loading, laden front/rear		kg	635/5340
2.3	Axle loading, unladen front/rear		kg	2465/1490
3.1	Tyre type			Polyurethane
3.2	Tyre size, front		mm	Φ343×140
3.3	Tyre size, rear		mm	Φ310×118
3.4	Additional wheels (castor wheels)		mm	Φ102×51
3.5	Wheels, number front/rear (x=drive wheels)			1x/2
3.6.1	Tread width, front	b ₁₀	mm	-
3.7.1	Tread width, rear	b ₁₁	mm	1148
4.0	Max lift height	H	mm	12000
4.1	Tilt of mast/fork carriage forward/backward		°	2/4
4.10	Height of wheel arms		mm	333
4.19	Overall length		mm	2443

SPECIFICATION		REF	UNIT	VALUE
4.20	Length to face of forks	l ₂	mm	1373
4.21	Overall width	b ₁ /b ₂	mm	1270
4.22	Fork dimensions	s/e/1	mm	40/120/1070
4.23	A,B Fork carriage class/type A, B			2A
4.24	Fork carriage width		mm	990
4.25	Distance between fork-arms			240/770
4.26	Distance between wheel arms/loading surfaces			915
4.3	Free lift		mm	2870
4.31	Ground clearance, laden, below mast		mm	70
4.32	Ground clearance, centre of wheelbase		mm	75
4.34.1	Aisle width for pallets 1000×1200 crossways		Ast	2835
4.34.2	Aisle width for pallets 800×1200 lengthways		Ast	2885
4.35	Turning radius		Wa	1770
4.4	Lift height	h ₃	mm	9500
4.5	Height, mast extended	h ₄	mm	10560
4.7	Height of overhead guard (cabin)		mm	2213
4.8	Seat height/standing height		mm	1076
5.1	Travel speed, laden/unladen		km/h	9/9.5
5.10	Service brake			Electromagnetic
5.2	Lifting speed, laden/unladen		m/s	0.45/0.55
5.3	Lowering speed, laden/unladen		m/s	0.5/0.45
5.8	Max. gradeability, laden/unladen		%	10/15
6.1	Drive motor rating S2 60 min		kW	7
6.2	Lift motor rating at S3 15%		kW	20
6.4	Battery nominal capacity		Ah	405
6.4	Battery voltage		V	48
6.4.1	Battery type			Li-Ion
6.5	Battery weight		kg	490
8.1	Type of drive control			AC
10.5	Steering design			Electronic
10.7	Sound pressure level at the drivers ear		dB(A)	70
15.1	Charger output current		A	200

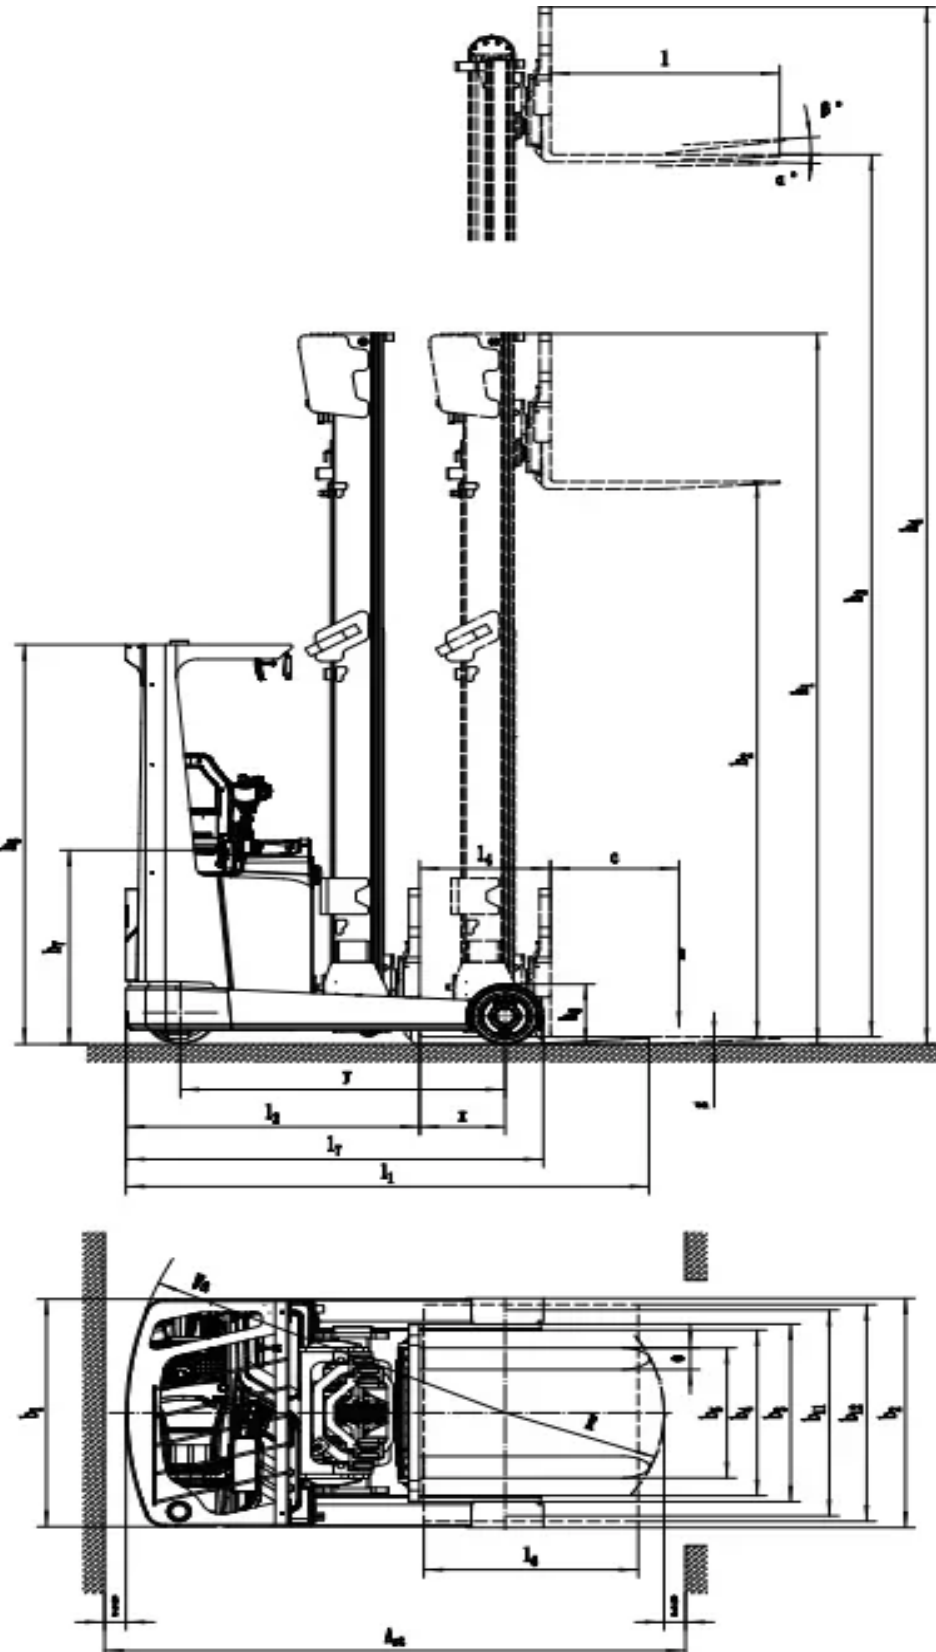

CQD20LB
RATED CAPACITIES GRAPH

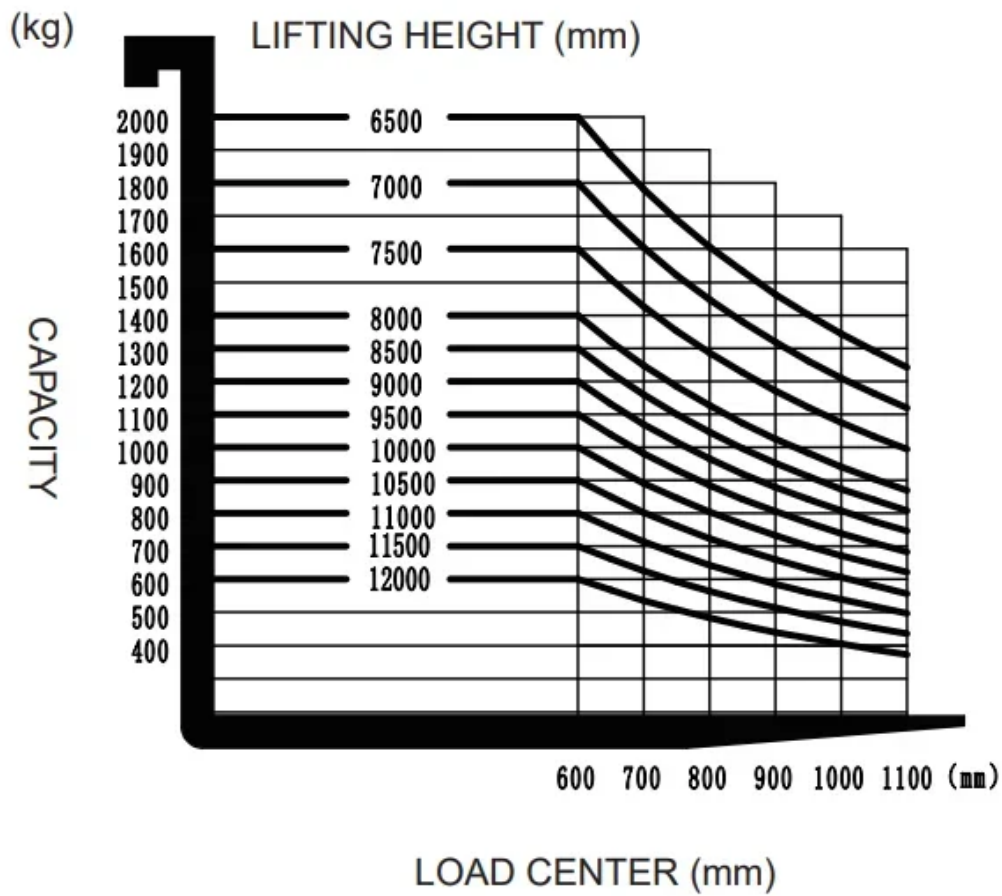

Mast Options

MAST TYPE	LIFT HEIGHT (H3, MM)	MAST LOWERED HEIGHT (H1, MM)	MAST EXTENDED HEIGHT, NO BACKREST (H4, MM)	MAST EXTENDED HEIGHT, WITH BACKREST (H4, MM)	FREE LIFT HEIGHT, NO BACKREST (H2, MM)	FREE LIFT HEIGHT, WITH BACKREST (H2, MM)
3-Free Mast	4000	1965	4720	5060	1080	900
3-Free Mast	4500	2135	5220	5560	1260	1070
3-Free Mast	5000	2300	5720	6060	1420	1235
3-Free Mast	5500	2465	6220	6560	1580	1400
3-Free Mast	6000	2635	6720	7060	1760	1570
3-Free Mast	6500	2800	7220	7560	1920	1735
3-Free Mast	7000	3045	7720	8060	2160	1890
3-Free Mast	7500	3215	8220	8560	2340	2150

MAST TYPE	LIFT HEIGHT (H3, MM)	MAST LOWERED HEIGHT (H1, MM)	MAST EXTENDED HEIGHT, NO BACKREST (H4, MM)	MAST EXTENDED HEIGHT, WITH BACKREST (H4, MM)	FREE LIFT HEIGHT, NO BACKREST (H2, MM)	FREE LIFT HEIGHT, WITH BACKREST (H2, MM)
3-Free Mast	8000	3380	8720	9060	2500	2315
3-Free Mast	8500	3600	9220	9560	2720	2535
3-Free Mast	9000	3765	9720	10060	2880	2700
3-Free Mast	6955	3430	7640	7980	2554	2370
3-Free Mast	7255	3430	7940	8280	2554	2370
3-Free Mast	7555	3430	8240	8580	2554	2370
3-Free Mast	7955	3430	8640	8980	2554	2370
3-Free Mast	8255	3430	8940	9280	2554	2370
3-Free Mast	9655	3930	10340	10680	3054	2870
3-Free Mast	10000	4159	10715	11065	3268	2568
3-Free Mast	10500	4329	11215	11565	3428	2728
3-Free Mast	11000	4489	11715	12065	3608	2908
3-Free Mast	11500	4659	12215	12565	3768	3068
3-Free Mast	12000	4819	12715	13065	3948	3248

Options

ITEM	OPTIONS (optional items marked in yellow)
Fork dimension	No 100*40*920 100*40*1150 100*40*1070 100*40*1370 100*40*1500 100*40*1600
Leg width	917
Fork carriage width option	770mm
Backrest height	1020mm
Load wheel type	Single
Seat type	Suspension + safety belt logic switch Suspension with armrest + safety belt logic switch
Attachments	Built-in sideshifter
Electrostatic chain	NO Yes and not customized
Load wheel material	PU

ITEM	OPTIONS (optional items marked in yellow)
Drive wheel material	PU
Battery capacity	405Ah (Li-ion) No
Charger	48V200A Li-ion External 48V150A Li-ion External
Area warning lamp	No Yes and not customized
Buzzer	No Yes and not customized
OPS system	Yes and not customized
Telematics	No Yes and not customized
Castor wheels	Yes and not customized
Front lamp	LED
Rear lamp	No LED
Warning lamp	Yes and not customized
Blue lamp	No Yes and not customized
Cold storage	No Yes and not customized
Forks tilt forward and backward	Yes and not customized
Overhead guard	Yes Driver-in
Special AUS/NZ options	Yes and not customized
Turn speed control	Yes and not customized
Heating system during lithium battery charging	No Yes and not customized
Operator identification device	No Card reader Fingerprint lock Keypad with card reader
Drive assembly	ZK25